


BUTTERFLY VALVE (Fixed lining)

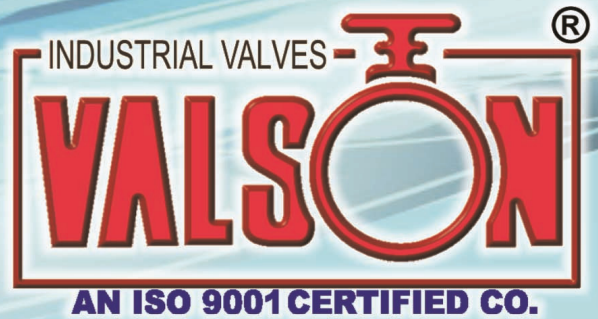


SPECIFICATION :

PRESSURE RATING : 10KG/CM2 MAX.
TEMPERATURE RATING : - 40 TO 120 DEG C.

STANDARD :

VALVES DESIGNED TO FIT WITHOUT GASKETS BETWEEN FLANGES DRILLED TO TABLE 'D', TABLE 'E', 'F' & ASA 150#.

SR. NO.	NOMENCLATURE	MATERIAL
1	BODY	CAST IRON.
2	DISC	S.S. 304 (CF8).
3	SEAT	NITRILE.
4	SHAFT	AISI 410.
5	'O' RING	NITRILE.

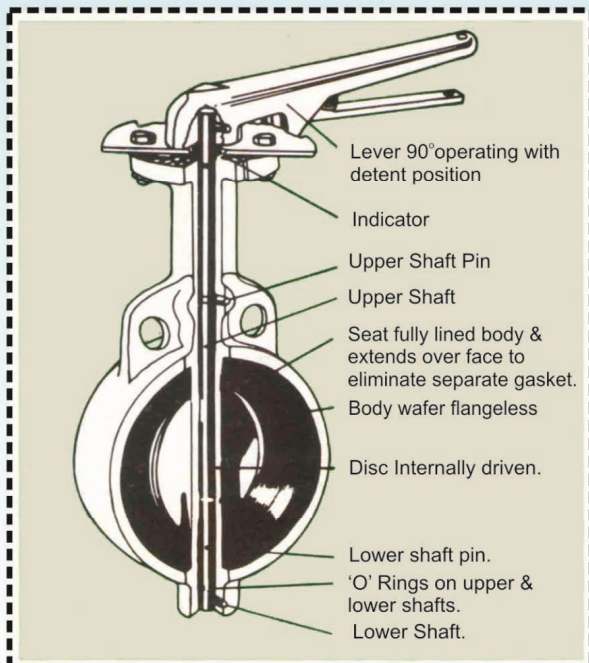

SALIENT FEATURES :

- ➔ EXCELLENT FLOW CONTROL IN QUARTER TURN OPERATION
- ➔ COMPACT SPACE SAVING DESIGN.
- ➔ BIDIRECTIONAL 100% TIGHT SHUT OFF.
- ➔ LOW WEIGHT, LOW MAINTENANCE, LONG SERVICE
- ➔ SUITABLE FOR MOUNTING BETWEEN ALL STANDARD FLANGES.

-: MFGR :-

VALSON VALVES MFG. CO.
AHMEDABAD.

Visit us : www.valsonvalves.com