


Jacketed Ball Valves, Full Bore.
Class-150, Flanged Ends, Lever Operated.

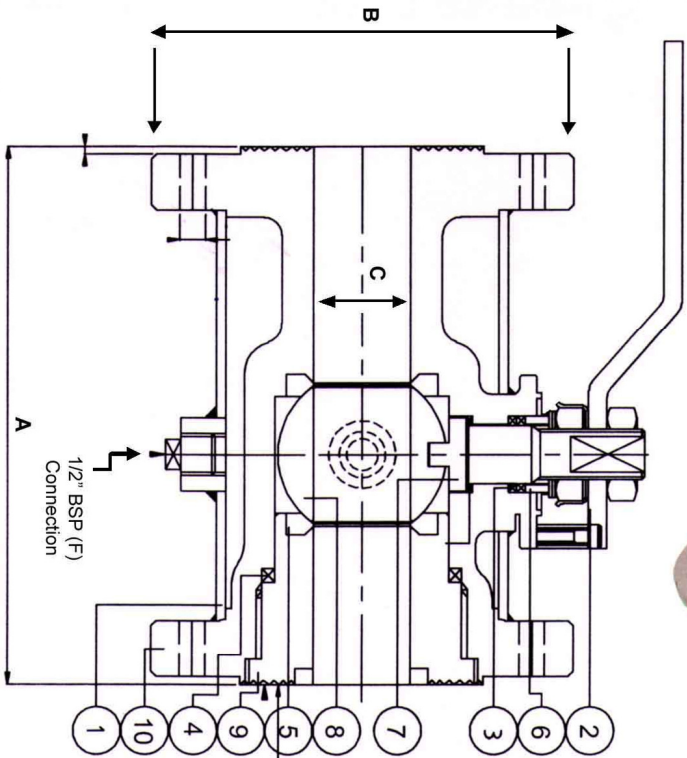

FLANGED ENDS, 150#
AS PER ASME B16.5, RF
SERRATED FINISH

BILL OF MATERIAL		
Sr. No.	Nomenclature	Material
10	Body	M.S. / S.S. 304/ S.S. 316.
9	Insert	M.S. / S.S. 304/ S.S. 316.
8	Ball	S.S. 304/ S.S. 316
7	Stem (Anti Blowout)	S.S. 304/ S.S. 316
6	Gland	S.S. 304/ S.S. 316
5	Seat	PTFE
4	Body Seal	PTFE
3	Stem Seal	PTFE
2	Lever	M.S./ S.S.
1	Jacket	M.S. / S.S. 304.

ALL DIMENSIONS ARE IN M.M.

Size	A (Fl to Fl)	B (O.D.)	C (Port)	PCD
15 X 25	95	107	12	80
25 X 40	100	127	24	98
40 X 50	140	152	37	121
50 X 65	178	178	50	140
50 X 80	178	190	50	152
65 X 80	185	190	63	152
80 X 100	190	229	75	190
100 X 150	203	279	100	241
150 X 200	240	343	150	298

+ 2mm Tolerance is acceptable.

HYDRO TEST PRESSURE	
BODY	SEAT
29kg/cm ²	22kg/cm ²

Jacket Operating Pressure : 7kg/cm²

WE RESERVE THE RIGHT TO CHANGE DESIGN & TECHNICAL DATA WITHOUT ANY PRIOR NOTICE.

MFG:-

VALSON VALVES MFG. CO. -- AHMEDABAD (GUJARAT).

Visit us : www.valsonvalves.com

