


Spring loaded NON SLAM CHECK VALVE (DCV) Investment Casting.

Technical Data :

Design Std.: DIN EN 558-2.
 Testing Std.: API 598.
 Rating : PN 25/ PN 40.
 Size Available : 15 to 150mm.

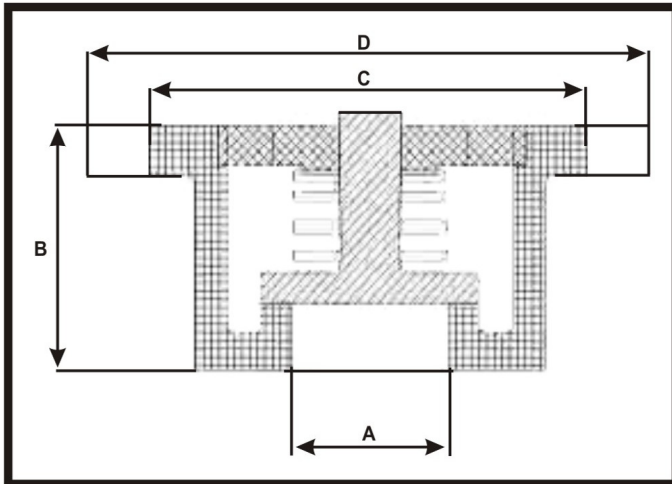

SALIENT FEATURES :-

- DCVs are simple to fit between two pipe flanges.
- Stronger, lighter & Smaller than conventional swing check valves.
- Spring loaded disc to prevent reverse flow in pipe lines.
- Compact design of valves flexibly accomodates various types of flange selection.

SIZE		A	B	C	D
INCH	MM				
½"	15	15	17	42	56
¾"	20	19	20	52	67
1"	25	25	23	63	80
1½"	40	40	32	85	101
2"	50	50	40	95	104
2½"	65	65	46	115	136
3"	80	80	50	133	154
4"	100	100	60	154	184
6"	150	150	105	222	252

SR. NO.	NOMENCLATURE	MATERIAL
1.	BODY	CF8/ CF8M/ CF3/ CF3M/ WCB.
2.	DISC	CF8/ CF8M/ CF3/ CF3M/ WCB.
3.	STAR (YOKE)	CF8/ CF8M/ CF3/ CF3M/ WCB.
4.	SPRING	SS 304/ SS 304L/ SS 316/ SS 316L

-: MFGR :-

VALSON VALVES MFG. CO. AHMEDABAD

Visit us : www.valsonvalves.com

ALL DIMENSION ARE IN M.M.