

S/STEEL 304/316 GLOBE VALVE FLANGED 150# (I.C.)



AN ISO 9001 CERTIFIED CO.



Technical Data :


Manufacturing STD. : BS 1873.

Testing & Inspection STD. : BS 6755 (Part - I).

Face to Face : As per ANSI B 16.10.

End Connection : Flanged as per ANSI B 16.5 RF 150#.

SR. NO.	NOMENCLATURE	MATERIAL
1	BODY	ASTM A 351 Gr. CF8 / CF8M.
2	BONNET	ASTM A 351 Gr. CF8 / CF8M.
3	SEAT RING	SS 304 / 316.
4	VALVE	SS 304 / 316.
5	SPINDLE NUT	SS 304 / 316.
6	SPINDLE	SS 304 / 316.
7	GLAND FLANGE	SS 304.
8	YOKE NUT	M.S.
9	GASKET	PTFE (TEFLON)
10	EYE BOLT & NUT	SS 304 / 316.
11	BOLT & NUT	SS 304 / 316.
12	GLAND PACKING	GRAPHOIL RING (GRAPHITE ASBESTOS)
13	HAND WHEEL	C.I.
14	HAND WHEEL NUT	M.S. / SS 304.

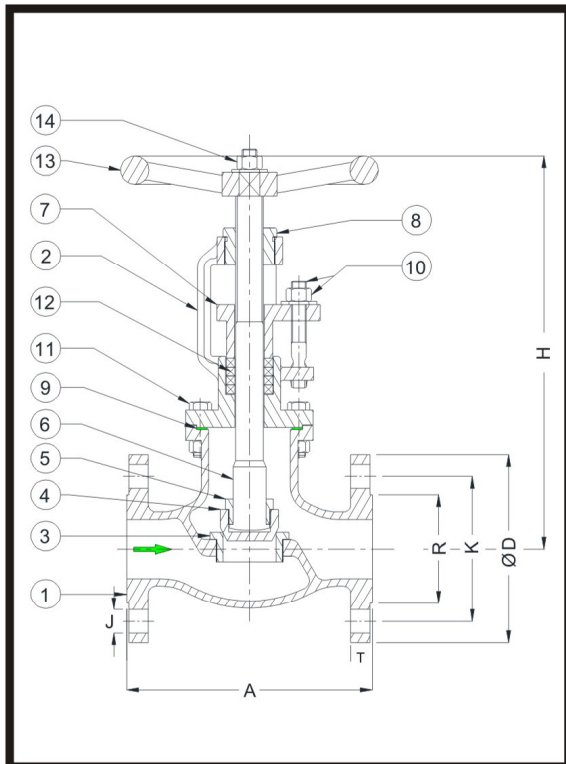

SIZE	A	D	H	K	T	N	J	R	
	INCH	MM	FI to FI	(O.D.)	HEIGHT	(PCD)	(THCK)	No of Hole (Hole Dia)	(RF)
1"	25	127	108	207	80	11	04	16	51
1.1/2"	40	165	127	280	98	15	04	16	73
2"	50	203	152	293	120	17	04	19	92
2.1/2"	65	216	178	346	140	18	04	19	105
3"	80	241	190	335	152	19	04	19	127
4"	100	292	229	340	190	25	08	19	157
5"	125	356	254	480	216	23	08	22	186
6"	150	406	279	470	241	24	08	22	216

All dimension are in M.M.

SERVICE RATING & TEST PRESSURE

CLASS	WORKING PRESS.	TEMPERATURE (MAX)	HYD. TEST PRESS.	
			BODY	SEAT
150#	150 PSIG	300 DEG. C.	425 PSIG	300 PSIG

: Mfg :
VALSON VALVES MFG. CO.
AHMEDABAD.

Visit us : www.valsonvalves.com