



S/STEEL 304/316 GLOBE VALVE FLANGED 300# (I.C.)

Technical Data :

Manufacturing STD. : BS 1873.

Testing & Inspection STD. : BS 6755 (Part - I).

Face to Face : As per ANSI B 16.10.

End Connection : Flanged as per ANSI B 16.5 RF 300#.




Sr. No.	Nomenclature	Material
1	Body	ASTM A 351 Gr. CF8/ CF8M.
2	Bonnet	ASTM A 351 Gr. CF8/ CF8M.
3	Seat Ring	SS 304 / 316.
4	Valve	SS 304 / 316.
5	Spindle Nut	SS 304 / 316.
6	Spindle	SS 304 / 316.
7	Gland Flange	SS 304.
8	Yoke Nut	M.S.
9	Gasket	PTFE (Teflon).
10	Eye Bolt & Nut	SS 304 / 316.
11	Bolt & Nut	SS 304 / 316.
12	Gland Packing	Graphoil Ring (Graphite Asbestos).
13	Handwheel	C.I.
14	Handwheel Nut	M.S. / SS 304.

SIZE		A	R	D	H	K	N	J
INCH	M.M.	FI TO FI	(RF)	O.D.	Height	PCD	No of Hole	Hole Dia
1"	25	203	51	124	212.5	89	4	19
1.1/2"	40	229	73	156	250	114	4	22
2"	50	267	92	165	260	127	8	19
2.1/2"	65	292	105	191		149	8	22
3"	80	318	127	210		168	8	22
4"	100	356	157	254		200	8	22

ALL DIMENSION ARE IN M.M.

SERVICE RATING & TEST PRESSURE				
CLASS	WORKING PRESS.	TEMPERATURE (MAX)	HYD. TEST PRESS.	
			BODY	SEAT
300#	400 PSIG	400 DEG. C.	1100 PSIG	800 PSIG

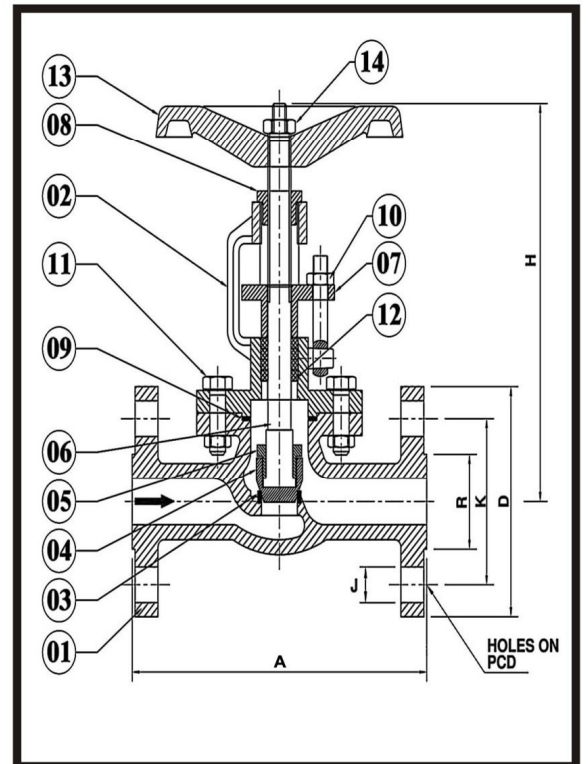

-: MFGR :-

VALSON VALVES MFG. CO.

Visit us : www.valsonvalves.com