

S/Steel 304/316



# SWING TYPE NRV (CHECK VALVE)



Flanged ASA 150# (Investment Casting)

**Technical Specification :**

Manufacturing & Design STD. : BS 1868.  
 Inspection & Testing STD. : API 598.  
 Face to Face : ANSI B 16.10  
 End Connection : Flanged to ANSI B 16.5  
 RF ASA 150#.

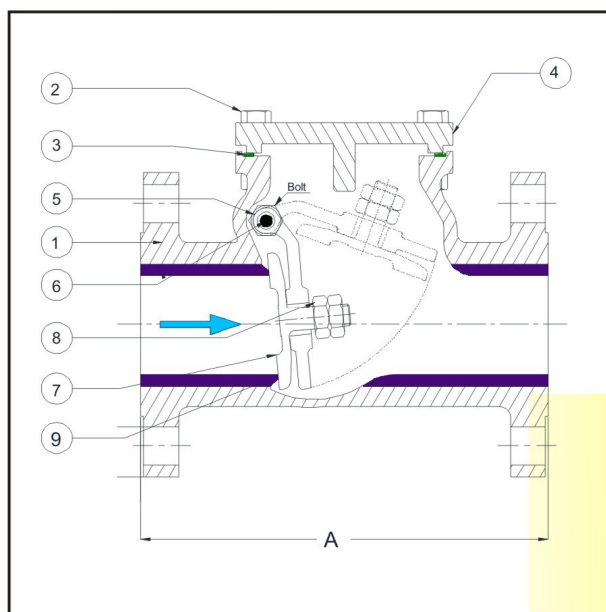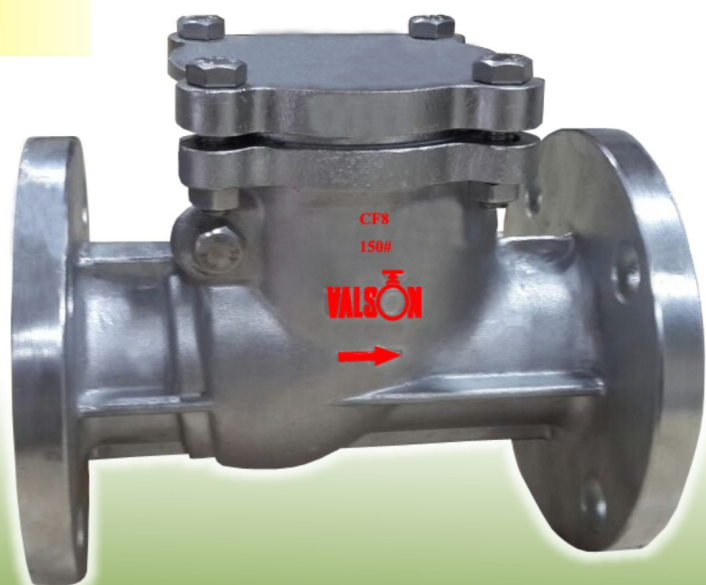

SIZE		A
INCH	MM	(FI TO FI)
1"	25	127
1.1/2"	40	165
2"	50	203
2.1/2"	65	215
3"	80	241
4"	100	292
5"	125	330
6"	150	356
8"	200	495

Sr. No.	Nomenclature	Material
1	Body	S/Steel 304/ 316.
2	Bolt & Nut	S/Steel 304/ 316.
3	Gasket	PTFE (Teflon)
4	Cover	S/Steel 304/ 316.
5	Hinge (Lever)	S/Steel 304/ 316.
6	Hinge Pin	S/Steel 304.
7	Disc (Flapper)	S/Steel 304/ 316.
8	Disc Retaining Nut & Washer	S/Steel 304/ 316.
9	Seat Ring	S/Steel 304/ 316.

All dimension are in M.M.

:- MFGR :-

**VALSON VALVES MFG. CO.**  
**AHMEDABAD.**

Visit us : [www.valsonvalves.com](http://www.valsonvalves.com)

SERVICE RATING & TEST PRESSURE				
CLASS	WORKING PRESS.	TEMPERATURE (MAX.)	HYD. TEST PRESSURE	
			BODY	SEAT
150#	10kg/cm2	250 Deg. C.	28kg/cm2	20kg/cm2

We reserve the right to change design & technical data without any prior notice.