

AN ISO 9001 CO.

SIZES : 15 NB/20 NB / 25 NB

END CONNECTIONS :

Screwed BSPT/NPT/BSP

Socket Weldable to ANSI B 16.11

LIMITING CONDITIONS :

For Screwed Ends - 32kg/cm² at 425° C

For SW Ends - 48kg/cm² at 454° C

Cold hydraulic test pressure - 96 kg/cm²

Minimum inlet pressure for satisfactory operation - 0.25 kg/cm²

NOTE :


Maximum operating back pressure should not be greater than 80% of the inlet pressure for satisfactory operation.

INSTALLATION :

Preferably in horizontal position with Control Disc on top. Can be fitted in any other position if unavoidable.

AVAILABLE SPARES :

The spares available are Control Disc, Strainer Screen.

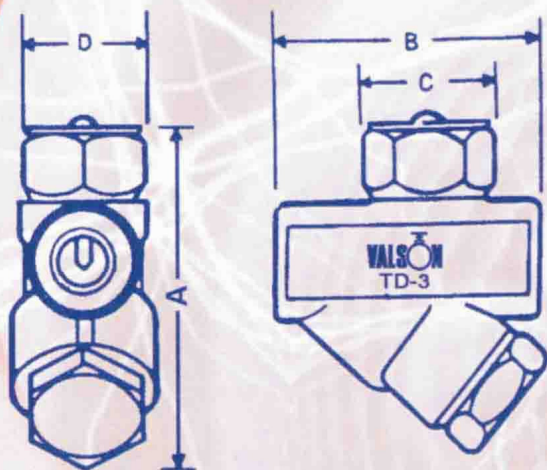

● DIMENSIONS (IN MM)

Size	A	B	C	D
15NB	116	79	47	40
20NB				
25NB	118	92	47	40

No.	PARTS NAME	QTY.	MATERIAL
1	BODY	1	ASTM A 217-85 Gr. CA 15
2	CAP	1	ASTM A 217-85 Gr. CA 15
3	CONTROL DISC	1	ASTM A 217-85 Gr. CA 15
4	SCREEN	1	S. S. 304
5	DRAIN PLUG	1	ASTM A 217-85 Gr. CA 15

THERMODYNAMIC STEAM TRAPS

You Deserve The Best



-: Mfg :-

VALSON VALVES MFG. CO.
AHMEDABAD.

Visit us : www.valsonvalves.com

~: Dealer ~: